



THE FLEXIBLE FELLING COMBINATION FOR EXTRA REACH.


TECHNICAL DATA



WOODCRACKER® CS crane	CS 620 crane + TA
Cutting diameter (in)	24
Gripper opening (in)	50
Extension working area (in)	up to 82
Deadweight (incl. adapter plate) (lbs)	1,830
Recommended pump flow capacity ²⁾ (gpm)	13 - 24
Recommended operating pressure ²⁾ (psi)	2,900 - 4,100
Chain lubrication of saw	oil
Permitted load ¹⁾ (lbs)	4,400
Service weight of carrier vehicle ³⁾ (lbs)	33,100 - 55,200
Service kit	included

Technical data and illustrations are not binding. Subject to changes for reasons of further development.

ELEVATE YOUR WORK.

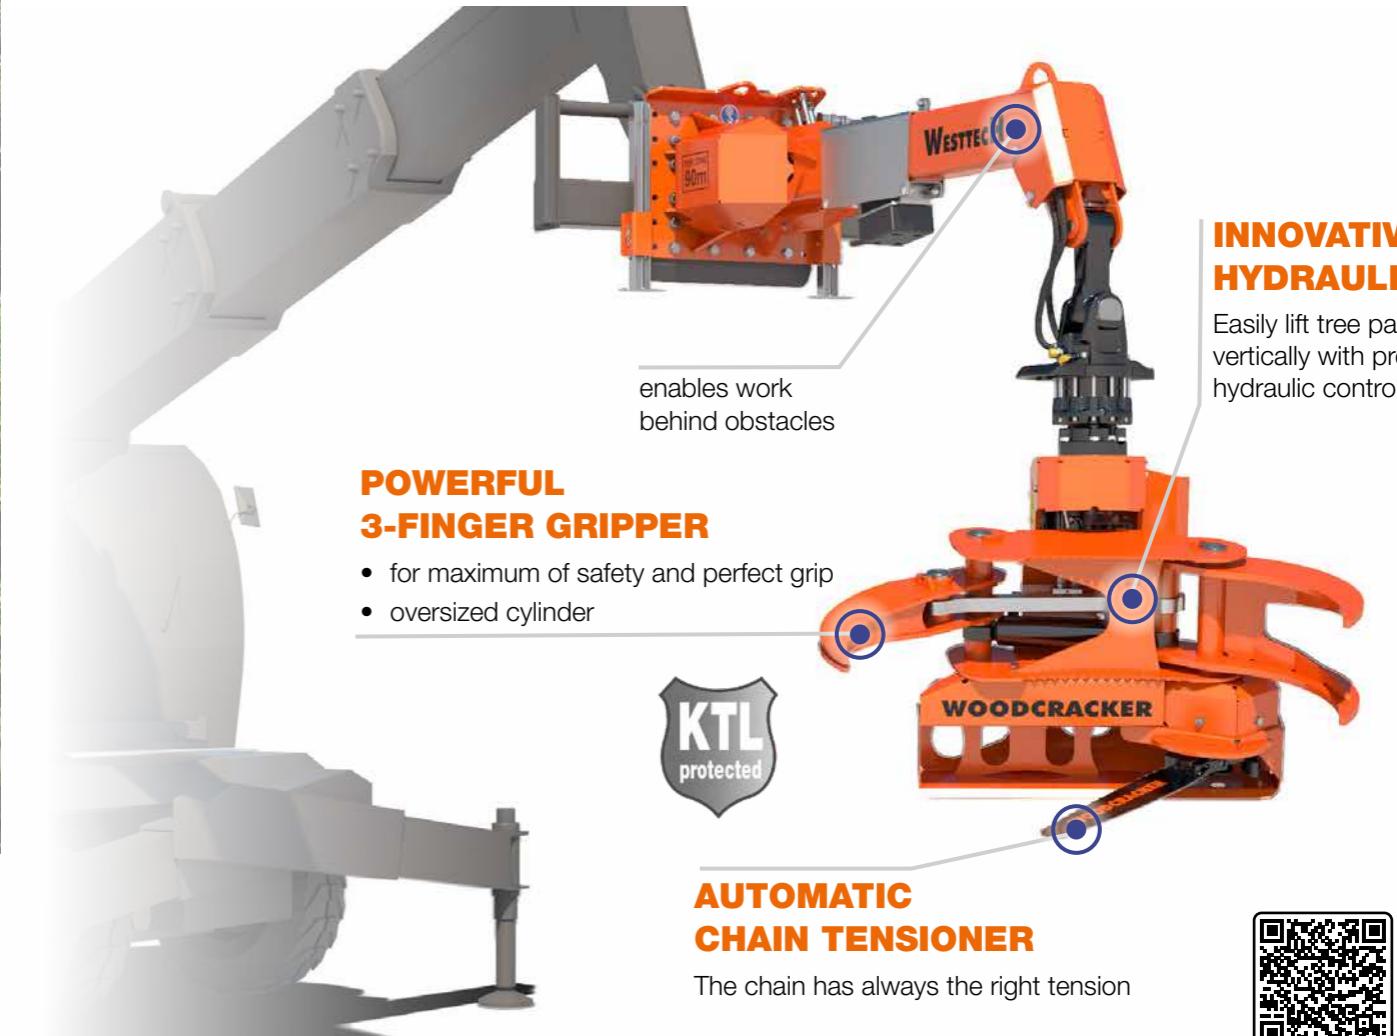

CHECK OUT YOUR BENEFITS!

- Reach every angle you need.
- Perfect for horizontal limbs.
- Extended reach, lightweight design.
- Ideal for removing sections from tree crowns.
- Innovative hydraulics allow sections to be removed in a standing position.
- The perfect addition for the teleloader, besides the CS smart.
- Durable KTL powder coating for long-term corrosion protection.
- Components made from Hardox® steel for extreme strength and long lifetime.



Woodcracker® CS620 crane with extension on a telehandler

¹⁾ Gross figures without attachment. Depending on carrier vehicle weight. ²⁾ Depending on operating mode or equipment.

³⁾ Depending on specifications of the operation vehicle.