




SPLIT WOOD THE EASY WAY.

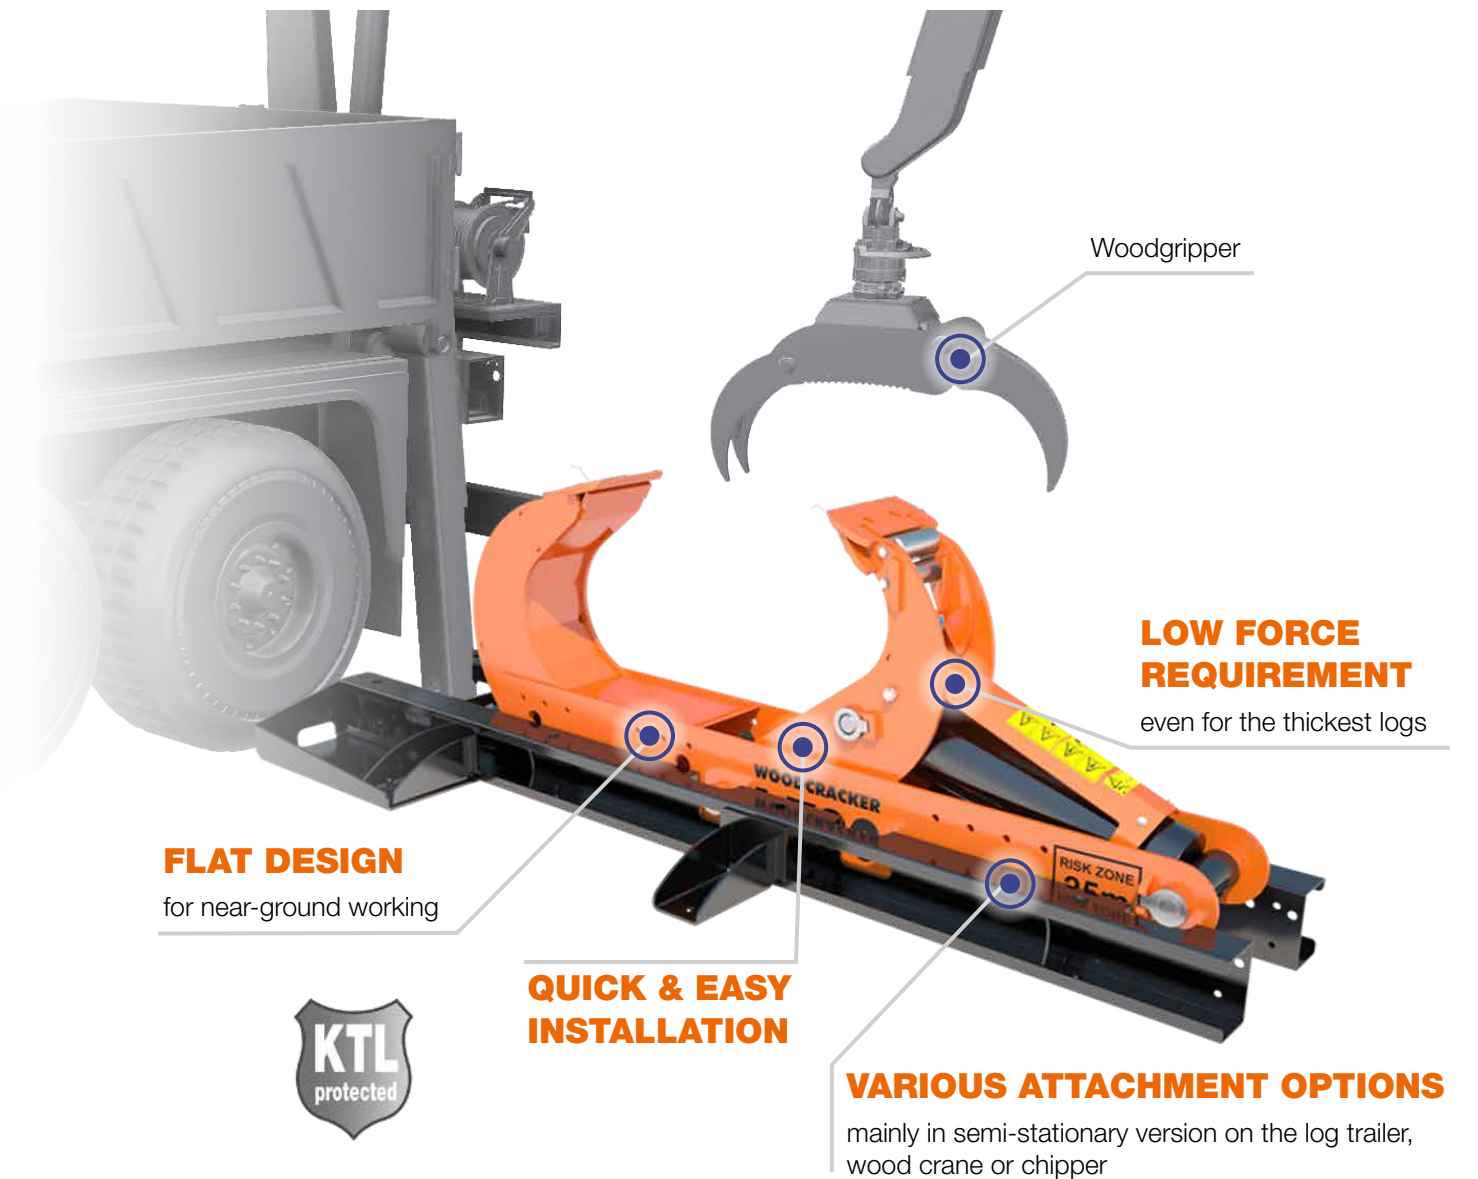

CHECK OUT YOUR BENEFITS!

- Optimal cost/benefit ratio.
- Decades of experience – **LEADER IN THE INDUSTRY!**
- Simple design.
- Pre-split for chippers or for firewood.
- Break up oversized logs.
- Multiple mounting options.
- Robust and proven technology – Low-wear and low-service.
- Durable KTL powder coating for long-term corrosion protection.
- Components made from Hardox® steel for extreme strength and wear resistance.



FAST, COMPACT,
TRAILER-READY
WOOD SPLITTING!



TECHNICAL DATA



To operate this product, the excavator needs one double acting hydraulic circuit.

WOODCRACKER® L	L 700	L 920	L 1200
Tongs opening (in)	28	35	47
Splitting force (depending on operating pressure) (lbs)	up to 48,500	upt to 48,500	up to 72,800
Deadweight (lbs)	630	820	2,400
Deadweight (incl. Stand unit) (lbs)	940	1,150	4,340
Recommended pump flow capacity ¹⁾ (gpm)	approx. 7 - 16	approx. 7 - 16	approx. 21 - 40
Recommended operating pressure ¹⁾ (psi)	2,600 - 3,500	2,600 - 3,500	3,200 - 3,900
Optional: Stand unit	•	•	•

Technical data and illustrations are not binding. Subject to changes for reasons of further development.

APPLICATION AREAS

- Splitting thick wood trunks.
- Pre-splitting wood allows a natural drying process and therefore increases biomass quality and energy yield.
- Can be used in all harvesting and processing methods of strong wood.
- Pre-splitting wood for further processing of split logs or chipped wood material.
- Easy supply of the pre-split material to chippers.



Stand unit for Woodcracker® L



Woodcracker® L1200 with stand unit - for the truck



Woodcracker® L700 with stand unit on timber trailer - low effort for splitting



Woodcracker® L920 with stand unit on timber trailer - splitting and loading in one work step



Woodcracker® L700 with stand unit - in combination with the Woodcracker® CS620 crane

¹⁾ Depending on operating mode or equipment. • available - not available