


WOODGRIPPER WG



WOODGRIPPER WG

THE ALL-ROUNDER!

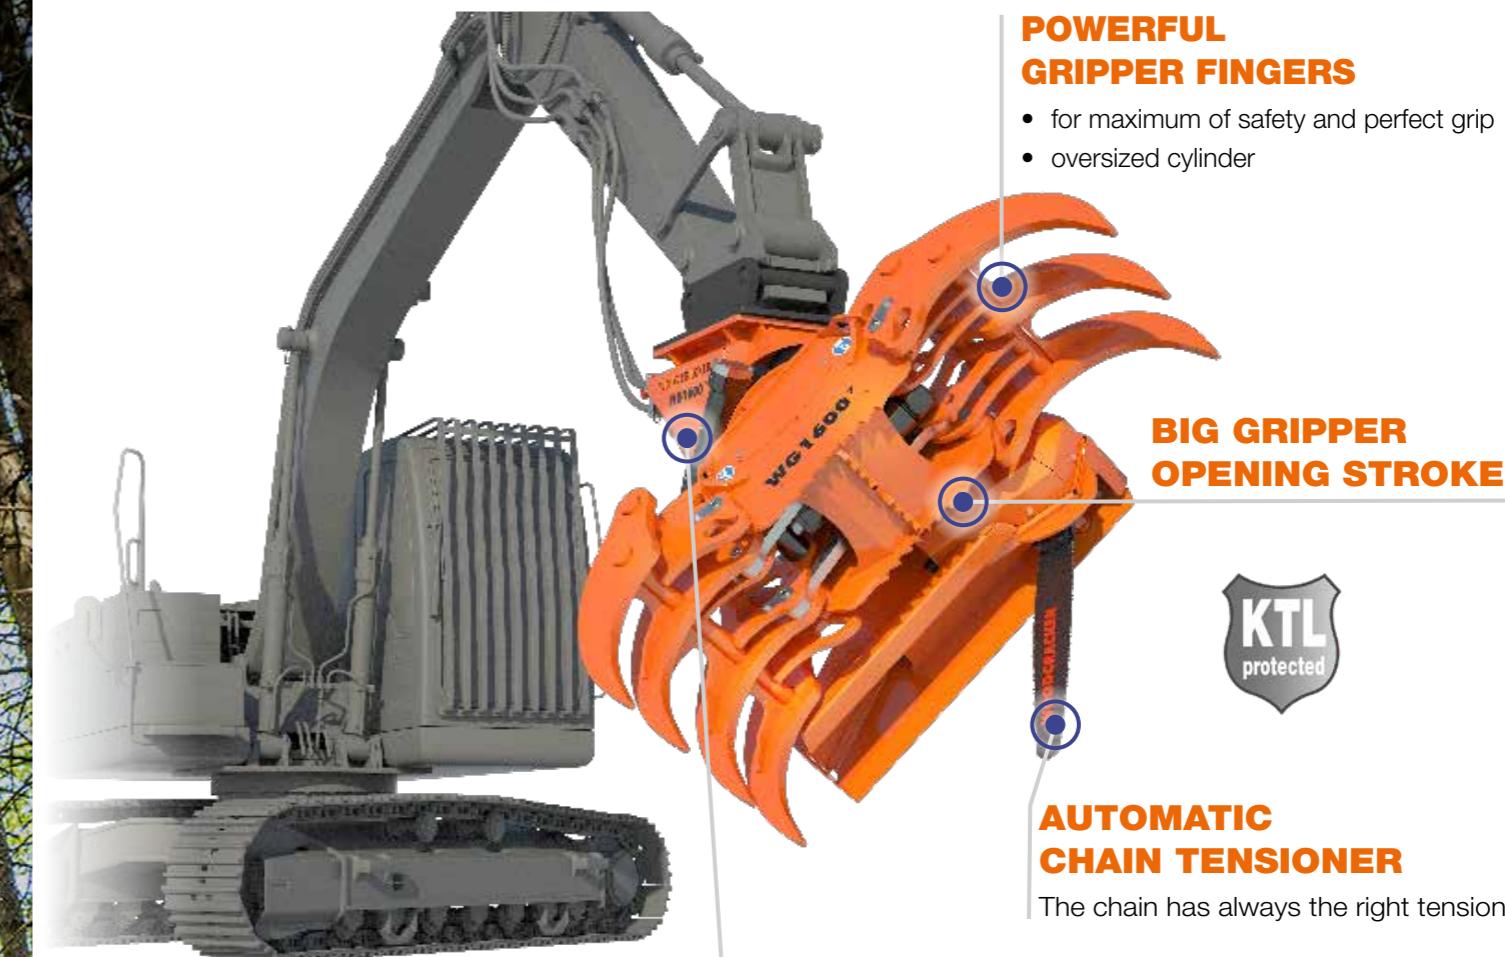

CHECK OUT YOUR BENEFITS!

- Multitool: felling & cleanup in one step.
- High gripping force: boosted power with oversized cylinder.
- Perfect mounting angle: precise felling & processing.
- Endless rotation: 360°.
- Easy workflow: simple operation.
- Ultimative multitool.
- Durable KTL powder coating for long-term corrosion protection.
- Components made from Hardox® steel for extreme strength and wear resistance.

YOUR MULTITOOL FOR EASY HANDLING, CLEANUP AND PRECISE FELLING.



TECHNICAL DATA



To operate the products, the excavator needs two double acting hydraulic circuits + 24V DC.

WOODGRIPPER WG with saw unit	WG 1600 ⁷
Gripper opening stroke (in)	63
Deadweight (incl. flange plate and Power-Tiltator) (lb)	3,300
Recommended pump flow capacity ¹⁾ (gpm)	24 - 50
Recommended operating pressure ¹⁾ (psi)	1,450 - 4,350
Service weight of carrier vehicle rigid ²⁾ (lb)	26,500 - 48,500
Service weight of carrier vehicle cardanic ²⁾ (lb)	26,500 - 48,500
Power-Tiltator	•
Service kit	included

¹⁾ Depending on operating mode or equipment. ²⁾ Depending on specifications of the operation vehicle. • available - not available

Technical data and illustrations are not binding. Subject to changes for reasons of further development.

APPLICATION AREAS

- Collecting/Loading/Manipulating.
- For tree trunks, branches or brushwood.
- Storm damage processing and natural disaster cleanup.
- Processing of already felled trees.
- Processing of windthrown timber.
- Loading of logs.
- Gripping and sawing pieces of wood.
- Transport preparation, wood is cut into suitable lengths.



Woodcracker® WG1600 on Takeuchi TB2150 crawler excavator - enables fast material handling



Woodcracker® WG1600 on Takeuchi TB2150 crawler excavator - optimal attachment angle for felling and processing



Woodcracker® WG1600 on Liebherr LH22 wheel excavator - high sawing performance



Woodcracker® WG1600 on Liebherr LH22 wheel excavator - tree felling