




TECHNICAL DATA



flexHead²
Rotation and vertical axis.



WOODCRACKER® CS flexHead®	CS590 flexHead ²
Cutting diameter (in)	23.6
Gripper opening (in)	50
Deadweight (fully equipped) ¹⁾ (lbs)	1.565
Recommended pump flow capacity ¹⁾ (gpm.)	13 - 24
Recommended operating pressure (psi)	3,300 - 4,350
Angle of motion vertically (degree)	160
Saw unit	rigid
Chain lubrication of saw	oil
Tiltator	endlessly rotatable
Automatic chain tensioner	available

FAST ON SITE. PRECISE IN TREE FELLING.

High Flexibility

as flexible as your wrist

Active movement of the kinematics

enables controlled material removal

Plug & Play

quick and easy installation

Extended reach


large working radius,
operation in the tree canopy

Lightweight

outstanding cutting
diameter-to-weight ratio

Powerful grapple

high gripping force, secure
handling of cut material

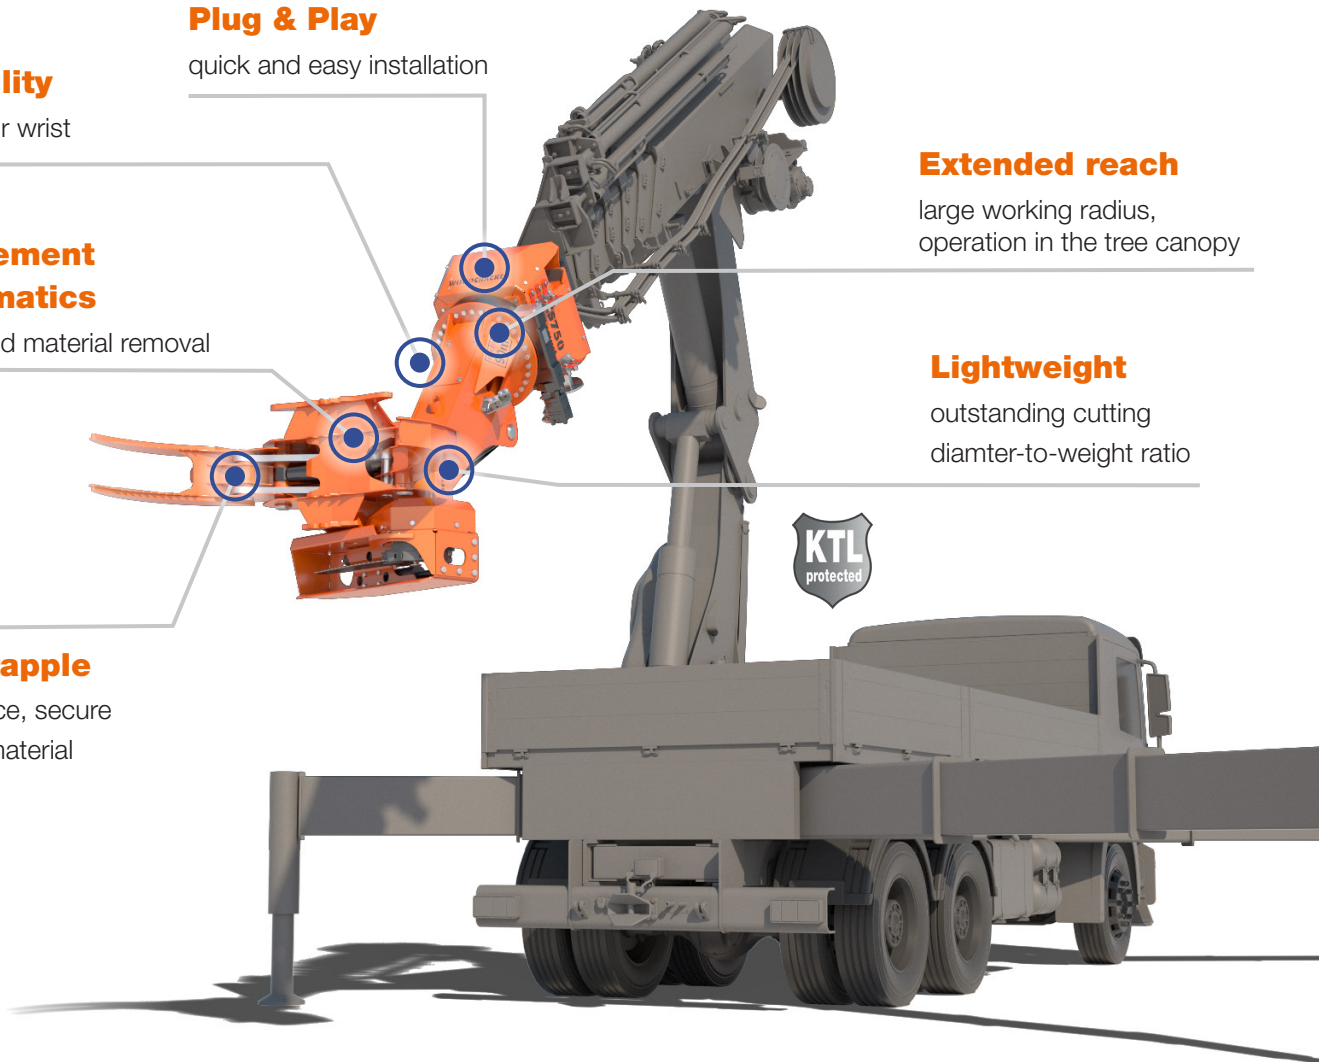

CHECK OUT YOUR BENEFITS!

- Reach every angle you need. Perfect for horizontal limbs.
- Ideal for removing sections from tree crowns.
- Innovative hydraulics allow sections to be removed in a standing position.
- Safe working method for operators.
- Quick set-up at the respective construction site. Fast on the road.
- High mobility & flexible control
- Robust and proven technology – Low-wear and low-service.
- Automatic chain tensioner
- Made of high-strength Hardox® steel.



Woodcracker® CS590 flexHead² for tree care.